


Spring Start-up Instructions

First things first:

Follow these simple steps for an easy pool opening!



Remove water and debris from pool cover. **Remove** and empty anchoring water bags. **Remove** cover, clean and store it.



Clean out skimmers and main drain. **Increase** water level to the middle of skimmer opening.



Check filter, pump and heater for winter damage and replace all drain plugs. **Start** filtration system.

Kit Contents:




Master Start-Up Kit up to 30,000 gal:

- 1 L METALpro
 - Excellent for well water pools
 - Not affected by extremes of pH
 - Will not add phosphates
- (4) 1 lb Super Shock Plus
- (2) 1 qt Spring Algaecide
- 1 qt Water Clarifier
- 1 L MAGICfree pro
 - No phosphate build-up
 - Prevent waterline rings
 - Helps preserve pool liners and finishes
- FREE 10 pk Test Strips

Kit Steps:

- 1** First, add a full bottle (1 L) of **Doheny's METALpro**. Let the water circulate for two hours.
- 2** Second, add four full bags (4 lb) of **Doheny's Super Shock Plus**. Let the water circulate for two hours.
- 3** Third, add two full bottles (64 oz) of **Doheny's Spring Algaecide**. Let the water circulate for two hours.
- 4** Fourth, add a full bottle (32 oz) of **Doheny's Water Clarifier**. Let the water circulate for two hours.
- 5** Last, add a full bottle (1 L) of **Doheny's MAGICfree pro**. Let the water circulate for two hours.

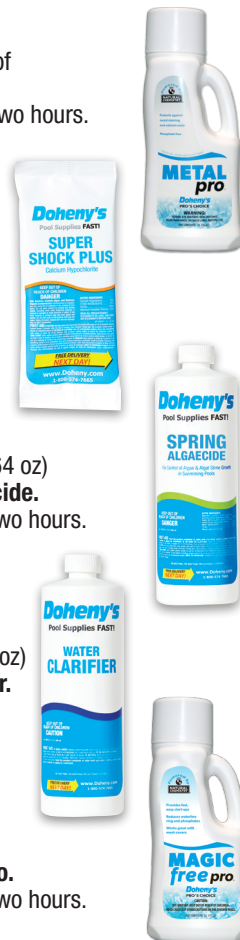

Pool Maintenance:



Balanced pool water helps ensure that your family swims safely and that your pool and equipment are protected from corrosion and scaling. Pool water must also be sanitized so that it is free of harmful organisms and algae. Start by testing and adjusting for proper chlorine, pH, and total alkalinity levels with your Test Strips or a Test Kit with fresh reagents.

Reading	Range
Chlorine	1.0-3.0 ppm
pH	7.2-7.6
Total Alkalinity	125-175 ppm Vinyl-lined, Fiberglass and Painted Pools
Total Alkalinity	100-150 ppm Gunzite Pools