




## MUCK VAC INSTALLATION AND ASSEMBLY INSTRUCTIONS

1. Attach garden hose to the Muck Vac Body, making sure the ball valve is in the closed position.
2. Attach the telescoping pole end with the plastic sleeve to the Muck Vac body
3. Attach the vacuum head to the Muck Vac Body. NOTE: The Muck Vac works with or without the vacuum head or brush. Try it both ways to find out what is best for your pond, fountain, spa or pool.
4. Attach the 1-1/4" discharge hose to the other end of the telescoping pole. Be sure the hose cuff is securely on. The unit is complete and ready to start cleaning.
5. Turn on the water supply and place the Muck Vac Head into the body of water that is to be cleaned. Now turn the ball valve to the ON POSITION.
6. The Muck Vac should start to suck the dirty water out immediately UNLESS your water supply pressure is 50 lbs. or less. Then you may need to PRIME unit.

**PRIMING UNIT:** This is done by lowering the discharge end of the pole close to the ground while keeping the other end submerged into the body of water to be cleaned. This should start the power siphon action needed to vacuum efficiently.

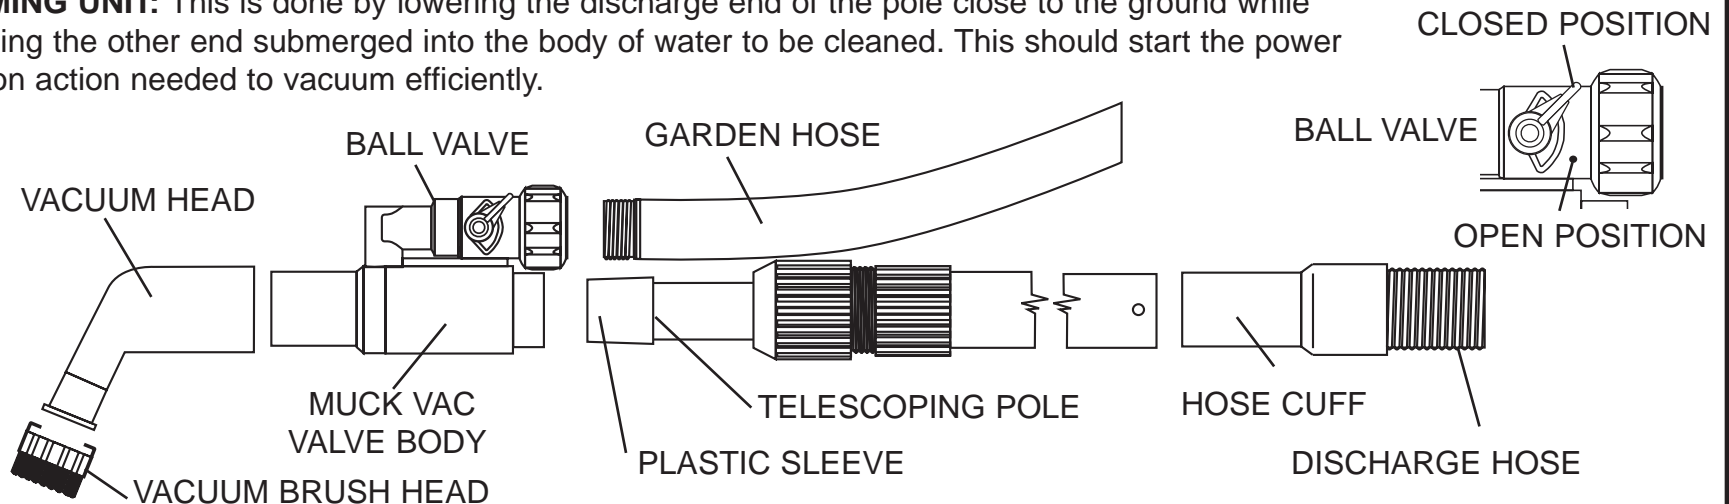

**NOTE: MUCKVAC requires 50 psi or greater garden hose water pressure for optimum use.**