


Safe-N-Secure™

Safety Cover Installation Instructions

Rectangular Cover Installation

1. After removing ladders and rails, pad all rough corners or sharp edges. Excessive wear due to non-padded areas is specifically excluded from the warranty.
2. Lay the cover over the pool evenly (protective strips on the bottom), with equal overlap between the edge of the pool and the edge of the cover (the overlap may range from 11" to 14").
3. Anchors will be installed at the corners of the cover first. Measure and mark the anchor points on the deck approximately 18" from the corner of the cover along the **width** line; then measure and mark the anchor point approximately 18" from the corner of the cover along the **length** line. The two anchors will be at right angles to the cover edge, as shown in **diagram 1**. Repeat for the remaining three corners of the cover.
4. a) Install the eight-corer-anchors. Drill a 3/4" hole, 2" deep. It is helpful to use a measuring guide or tape to mark 2" from the tip of the bit to ensure accurate depth each time. Drilling dust should be removed to ensure a proper fit.
b) Remove the anchor screw from casing and spray both pieces as well as the tamping tool with silicon.
c) Insert the tamping tool into the anchor casing and tamp the casing into place, then install the anchor screw into the casing using hex key.
5. a) Lace each corner strap through the triangle shaped side of a spring. Adjust the buckle so that the spring will be 60% compressed (when attached to the anchor). See **diagram 1**.
b) To attach the spring to the anchor, insert the aluminum installation rod through the round end of the spring.
c) Place the heel of the rod behind the raised anchor screws with the notched area toward the pool, then pull the rod handle away from the pool, using your foot to assist the sliding of the spring onto the raised anchor. See **diagram 2**.
d) Rotate the rod until the heel is free from the anchor bolt (180°).
6. Once the corner installations are complete, install the remaining anchors **approximately 18" from the edge of the cover**, in a straight line with each strap. Each anchor must be at a right angle to the edge of the cover to ensure there are no bulges.
7. When installation is complete, check and adjust springs as necessary to ensure that the tension is equal on all parts of the cover, and all edges are straight.

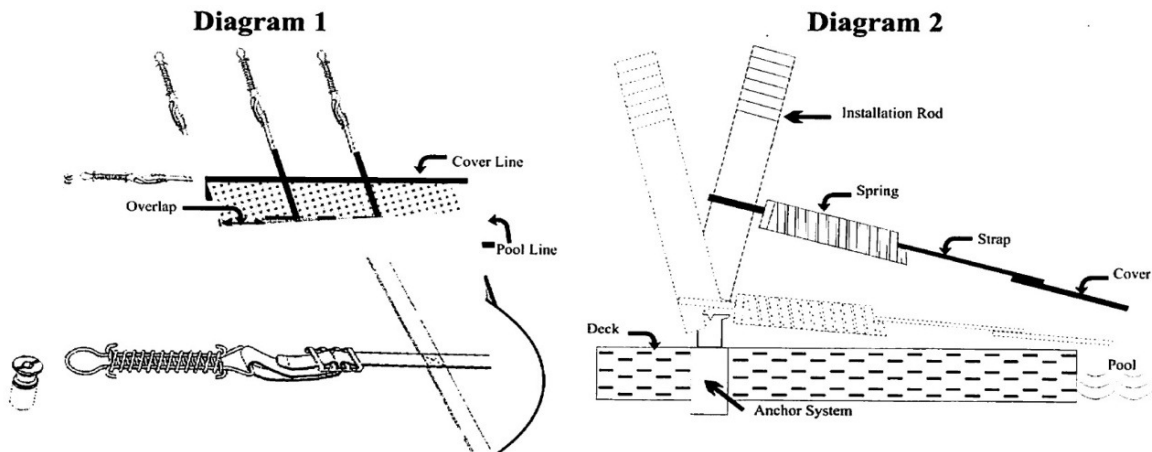

26 Dansk Court, Etobicoke, Ontario M9W 5V8
Phone: 416-640-5590 - Fax: 416-642-0686
Email: info@coverttechind.com
Website: www.coverttechind.com

Safe-N-Secure™

Care and Maintenance Instructions

Springs

- Upon initial installation, springs should be compressed about 60% to provide a good fit. The tension will gradually decrease on its own.
- We recommend re-tightening the cover 2 to 3 weeks after initial installation.

Water Level

- For the full snow season, the pool water level must be no lower than 15" to 18" below the top of the pool. This allows cover to support the weight of the snow without excessive stress.
- Failure to maintain the proper water level will void the warranty.

Water Treatment

- Proper levels of chlorine and algaecide are required year round to maintain clear and clean pool water. Additional algaecide should be added to the pool when the air temperature is consistently 16°C (60°F) or higher.

Anchors

- Anchor casings should be flushed out with a hose two to three times per year. Simply remove the anchor screw to flush the casing.
- Close anchor completely (i.e flush with the deck) when cover is removed.

Removal and Storage

- The cover should be cleaned by hose prior to removal
- For ease of handling, fold the cover accordion style during removal
- Store your cover in the provided bag and hang it to allow drainage through the bag.
- Store your cover in an elevated place to avoid animal or rodent infestation (i.e. garage, garden shed)

Safety

- Although the cover will support the weight of an adult or a child in an emergency, we **do not** recommend walking on it.

Preventative Measures

- ✓ Do not drag cover on concrete deck, or any abrasive surfaces
- ✓ Check pool to ensure that water level is not lower than 18" below top of pool coping
- ✓ Be careful not to catch springs or brass anchors to cover material
- ✓ Carefully inspect cover every year at time of installation to ensure that material has not deteriorated from normal use
- ✓ It is recommended that rough surfaces be protected with padding (carpeting, vinyl etc.)

COVERTECH INDUSTRIES LIMITED will not be held responsible for improperly installed covers. Safety covers should be installed by a trained professional

26 Dansk Court, Etobicoke, Ontario M9W 5V8
Phone: 416-640-5590 - Fax: 416-642-0686
Email: info@covertechind.com
Website: www.covertechind.com