



# Safety Cover Measuring Form

MEASURING YOUR POOL IS EASY! THERE ARE 7 STEPS TO FILLING OUT THIS FORM, PLEASE FOLLOW DIRECTIONS CAREFULLY.


1. Your Name:	After completion, submit this form Digitally Online or by Mail				
Address:  City: State: Zip  Phone: Today's Date:	p: Email Form: customsales@doheny.com  Mail Printed Form: 10411 80th Ave, Pleasant Prairie, WI 53158				
Email:					
Custom Representative:					
2. CHOOSE YOUR TYPE OF SAFETY COVER: ALL SAFETY COVER WARRANTI	ES ARE PRO-RATED. CANNOT MATCH ANCHORS FOR BUNGEE COVERS				
<ul> <li>Hinsperger Safety Covers Ships in 10-14 business days.</li> <li>Solids</li> <li>□ 10 Year Warranty Aquamaster Lightweight Solid with Drain Specify blue, green, tan, or gray.</li> <li>□ 10 Year Warranty Aquamaster Lightweight Solid with Pump Specify blue, green, tan, or gray.</li> <li>Mesh</li> <li>□ 12 Year Warranty 90% Sunblock Standard Mesh Specify blue, green, tan, black, or gray.</li> <li>□ 12 Year Warranty 95% Sunblock Mesh Specify blue or green.</li> <li>□ 12 Year Warranty 99% Sunblock Mesh Specify blue, green, tan, or gray.</li> </ul>	GLI Safety Covers Ships within 3 business days.  Solids  10 Year Warranty Xtra-lite Solid with Drain Specify blue or green.  10 Year Warranty Xtra-lite Solid with Pump Specify blue or green.  15 Year Warranty Premium Solid with Drain Specify blue, green, tan, or gray.  15 Year Warranty Premium Solid with Pump Specify blue, green, tan, or gray.  Mesh  12 Year Warranty 92% Sunblock Standard Mesh Specify blue, green, tan, or gray.				
<ul> <li>Meyco Safety Covers Ships in 14-18 business days.</li> <li>Solids</li> <li>□ 12 Year Warranty Perma-Guard Solid with Drain Specify blue, green, or black.</li> <li>□ 12 Year Warranty Perma-Guard Solid with Pump</li> </ul>	<ul> <li>□ 15 Year Warranty 98% Sunblock Mesh Specify blue, green, tan, or gray.</li> <li>CoverTech Safety Covers Ships in 14-18 business days.</li> <li>Mesh</li> </ul>				
Specify blue, green, or black.  Mesh	30 Year Warranty 93% Sunblock Commercial Mesh Available in black only.				
□ 12 Year Warranty 95% Sun-block Meycolite Mesh Specify blue, green, black, grey, or mocha.	Freeform shaped pools automatically come in 3 ft $x$ 3 ft spacing. Standard shaped pools automatically come in 5 ft $x$ 5 ft spacing.				
☐ 12 Year Warranty 99% Sun-block Rugged Mesh Specify blue, green, grey, or mocha.	PRIOR SAFETY COVER: ☐ Yes ☐ No See Step 6A for prior safety cover measurements. Two sets of AB measurements are required, one of pool and one of anchors.				

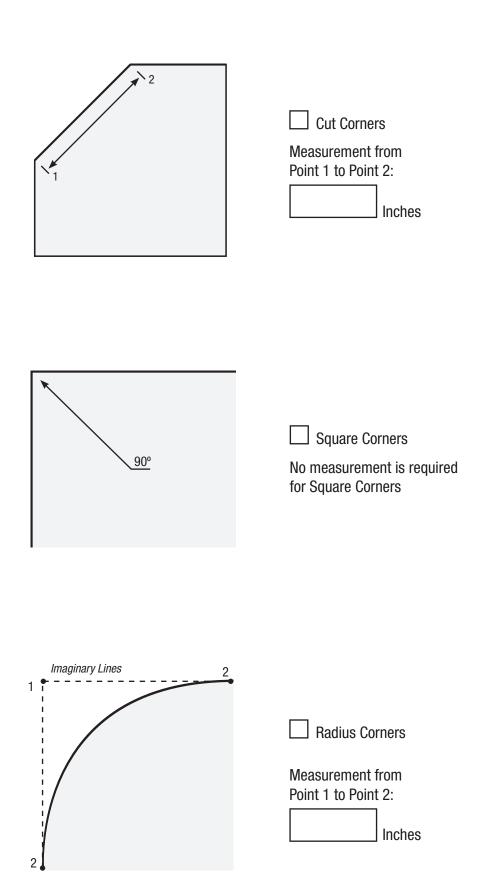

4. CHOOSE YOUR POOL SHAPE AND FILL IN DIMENSIONS BELOW - If you do not see your pool shape continue to section 5A on page 4.

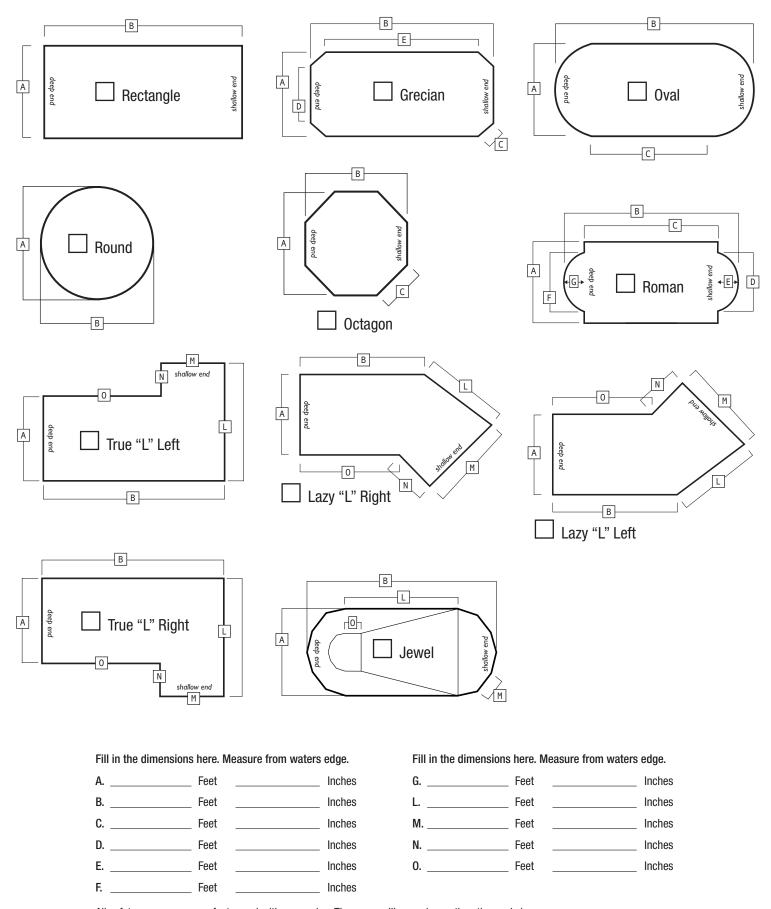


All safety covers are manufacturered with an overlap. The cover will come larger than the pool size.

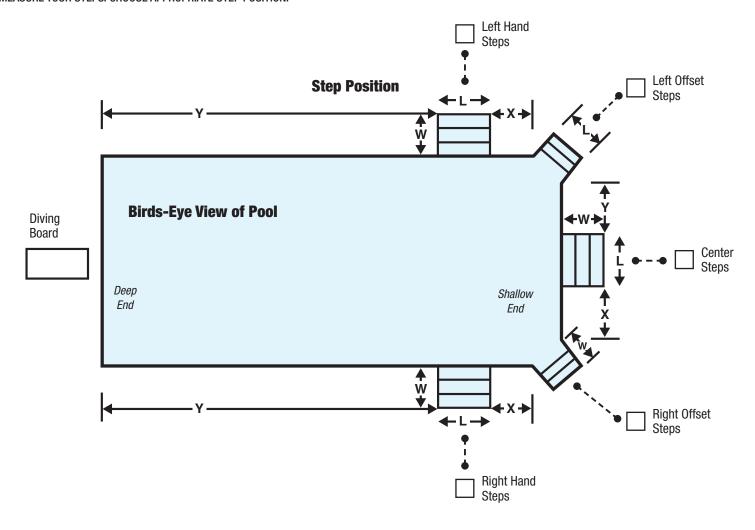

Please see illustration above for step location.


$$W = Step Width L = Step Length$$





#### 6a. CUSTOM SAFETY COVER - AB Measurement Instructions


AB Measurements are required for a freeform pool or pools that have had a prior safety cover. If you are replacing a safety cover, you will need to provide 2 set of AB Measurements. 1st Set of AB Measurements is for the perimeter of your pool. 2nd Set of AB Measurements is to each anchor location. Start by sketching a diagram of the pool on paper. Include location and detail of your pool deck and any non-removeable obstructions, such as slides, dive stands, grab rails and ladders that lie within 18 inches of pool edge.


- 1. Using chalk or masking tape to establish your AB plot line: Start from 4 feet away from the pool edge, or 3 feet away from the anchors if replacing a cover, plot a line along the length of the pool. The line should not interestect the pool in any direction and should be at least 2/3 the length of the pool.
- 3. Measure to each plot point from Point A: Attach or have a partner hold one end of a tape measure at Point A, measure to each point, starting at point one, and record in the corresponding box A1 on the measuring form. Continue measuring to each point around the pool perimeter and record each measurement. Repeat from Point B to each plot point in numerical order.

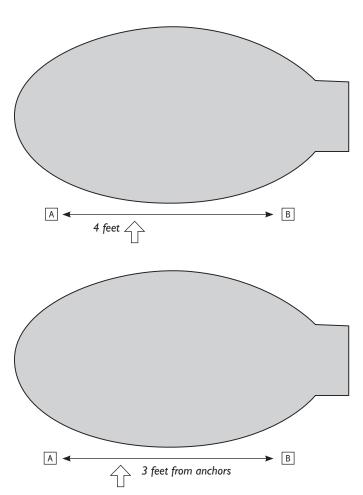

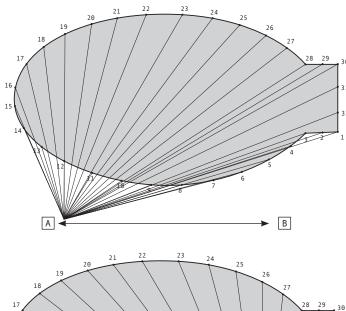




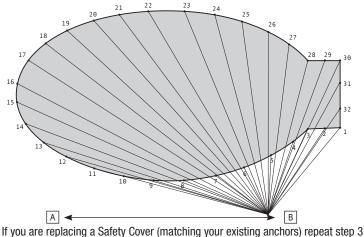




using the same AB Plot Point, measuring to each anchor from A and B. Be sure to

start at the same anchor for your B measurements as you did for A.

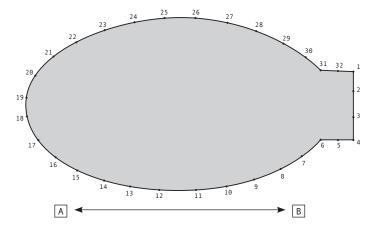

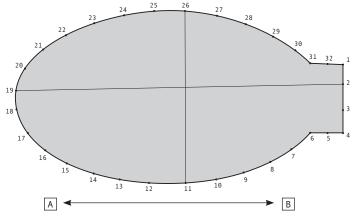

# **OVERALL POOL MEASUREMENTS**

# PLEASE COMPLETE ALL CROSS MEASUREMENTS FOR POOL, see 6a for more information.

Distance from - Point <u>A</u>	_to PointB_:	:ft	in
Overall Pool Width - Point	_to Point:	ft	in
Cross Dimensions Width - Point	_to Point:	ft	in
Cross Dimensions Width - Point	_to Point:	ft	in
Overall Pool Length - Point	_to Point:	ft	in
Cross Dimensions Length - Point	_to Point:	ft	in
Cross Dimensions Length - Point	_to Point:	:ft	in

Point #	Distance to A	Distance to B									
1			21			41			61		
2			22			42			62		
3			23			43			63		
4			24			44			64		
5			25			45			65		
6			26			46			66		
7			27			47			67		
8			28			48			68		
9			29			49			69		
10			30			50			70		
11			31			51			71		
12			32			52			72		
13			33			53			73		
14			34			54			74		
15			35			55			75		
16			36			56			76		
17			37			57			77		
18			38			58			78		
19			39			59			79		
20			40			60			80		

### **OVERALL ANCHOR MEASUREMENTS**

 $\label{lem:please complete all cross measurements for anchors, see 6a for more information. \\$ 

Distance from - Point <u>A</u>	_to PointB	_:	ft	in
Overall Pool Width - Point	_to Point	_:	ft	in
Cross Dimensions Width - Point	_to Point	_:	ft	in
Cross Dimensions Width - Point	_to Point	_:	ft	in
Overall Pool Length - Point	_to Point	_:	ft	in
Cross Dimensions Length - Point	_to Point	_:	ft	in
Cross Dimensions Length - Point	to Point_	_:	ft	in

Point #	Distance to A	Distance to B									
1			21			41			61		
2			22			42			62		
3			23			43			63		
4			24			44			64		
5			25			45			65		
6			26			46			66		
7			27			47			67		
8			28			48			68		
9			29			49			69		
10			30			50			70		
11			31			51			71		
12			32			52			72		
13			33			53			73		
14			34			54			74		
15			35			55			75		
16			36			56			76		
17			37			57			77		
18			38			58			78		
19			39			59			79		
20			40			60			80		

# 7. ADDITIONAL CUSTOM SAFETY COVER QUESTIONS - PLEASE ANSWER ALL QUESTIONS CAREFULLY

(Refer to 6a: Plotting a freeform non-standard shape pool for questions G-M)

A.

B.

<b>DECK</b> Is there at least 3 ft of concrete around the pool? ☐ Yes If no, is the deck made of wood, loose brick, loose stone, pavers, g	G. GRAB ROCKS (Please send photo) What is the distance from the water edge to each of the grab rocks?  grass,
other?	H. RAISED BUND BEAMS/RAISED WALLS (Please send photo)
LADDERS, HAND RAILS, AND GRAB RAILS	Very accurate dimensions are required of each end of beams/ walls. Also incude measurements along the obstructions.
Are there any ladders, hand rails or grab rails that are non-rem	
☐ Yes ☐ No Please provide the following dimensions be	
LADDER	
	I. RAISED SPA (Please send photo)
A = DECK ( +B	What are the dimensions of each end of the spa, as well as points along the spa wall?
<del></del>	NATER
HAND RAILS	How high is spa raised above the coping?
A = DECK DECK	Is there is a spillway that must be padded, what are the dimensions?
	<i>Vater</i> J. Spa Wall
1 11	How thick across is your spa wall?
GRAB RAILS	
A = L DECK	K. FLUSH PLANTING AREA (Please send photo)
—————————————————————————————————————	Will planter be strong enough to snap-hook cover to it?
C. COPING	/ATER
Does your pool have rough concrete, brick or stone coping?	What is the width of coping on this area?
D. FILL SPOUT	What is the distance between coping and planter?
What is the distance from water edge to the fill spout?	
what is the distance from water edge to the fill speat:	L. WATERFALLS/ROCKS (Please send photo)
	Supply accurate dimensions for each end of obstructions, and at
E. SLIDE LEGS	close 1 ft intervals between.
What is the distance from the water edge to each of the slide le	egs?
F. DIVING BOARD STAND	M. OHANGE PEOKLEVELO
What is the distance from the water edge to the diving board st	M. CHANGE DECK LEVELS (Please send photo)
and anomalies man and water days to the arring bould be	tand? Supply critical dimensions.
AGREEMENT BETWEEN DEALER AND POOL OWNER: ( Custom Safety Covers are NOT refundable, Pool owner assum	Cover specifications above were provided by the Pool Owner. es responsibility for ALL cover specifications. Allow approximately 3 weeks
from date of order for delivery.	co
Pool Owner Signature:	Date:

Be sure not to drop the pools water level more than 18" from top of pool during winter months. Failure to do so will place undue strain on the cover and void warranty.